

VMD10



Features

- ◆ VMD10 is a compact and powerful in-line design. This linear and compact design makes the VMD10 well suited for use in industrial applications where installation space is limited.
- ◆ Main applications : industrial automation
- ◆ Input voltage : 24V DC / 12V DC
- ◆ Max. load : 1000N (push/pull) @ 24V DC
- ◆ Max. current : 3.8A @ 24V DC
- ◆ Max. speed : 18 mm/sec @ no load
- ◆ Stroke : 50~300 mm (other stroke available)
- ◆ Duty cycle : 10% or 2 min continuous operation in 18 min.
- ◆ IP protection level : IPX4
- ◆ Color : Black
- ◆ Noise Level : ≤ 65 dB
- ◆ Preset limit switches

Options

- ◆ Straight Cable / Spiral Cable
- ◆ Connector: F type Din plug (4pin) / Round and Flat plug (2pin)

Compatibility





1. Handset

VHD, VHT, VH2N, VRF, VTX

2. Control box


VT-control box, VCB3T

Performance Data

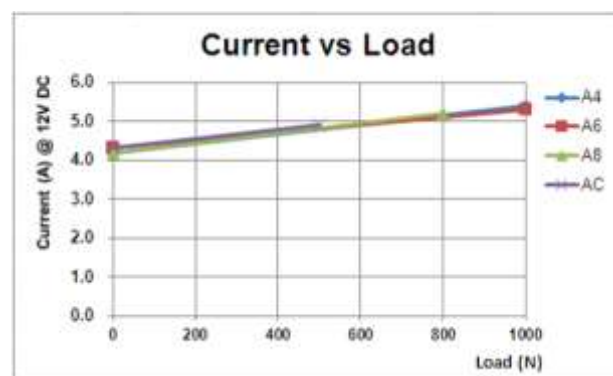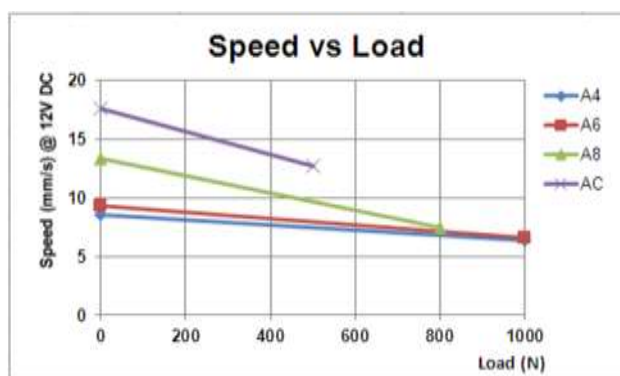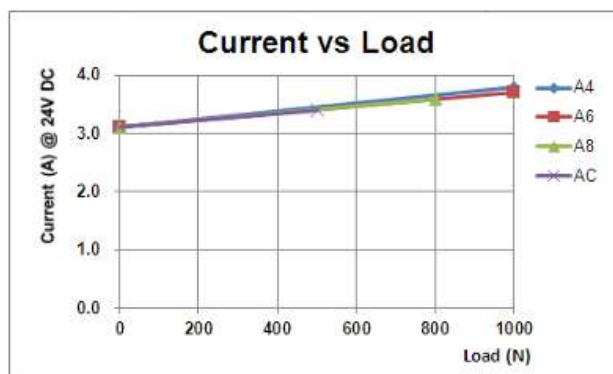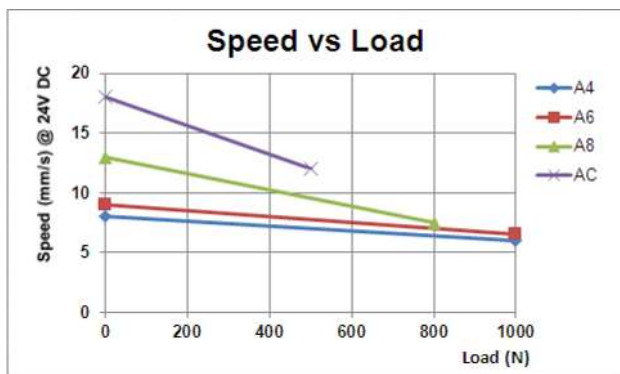

Model No.	Push Max. (N)	Pull Max. (N)	Speed (mm/s)		Current (A)			
			No load	Full load	No load		Full load	
					12V	24V	12V	24V
VMD10-XX-A4-16-XXX.XXX-CXX	1000	1000	8	6	4.2	3.1	5.4	3.8
VMD10-XX-A6-16-XXX.XXX-CXX	1000	1000	9	6.5	4.3	3.1	5.3	3.7
VMD10-XX-A8-16-XXX.XXX-CXX	800	800	13	7.5	4.2	3.1	5.2	3.6
VMD10-XX-AC-16-XXX.XXX-CXX	500	500	18	12	4.3	3.1	4.9	3.4

Dimension

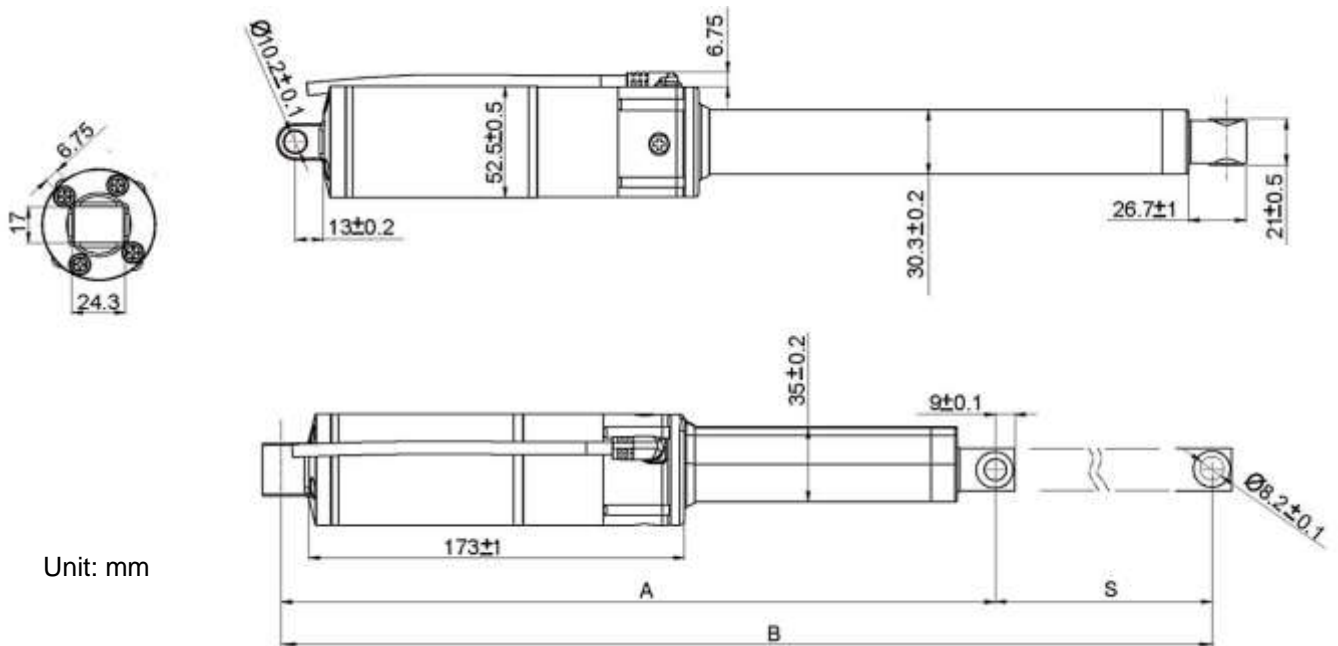

◆ Front Connector



C1x

Plastic



C3x

Round hole



C9x

Universal joint



CAx

Aluminum+
bushing



CBx

Round hole+
bushing

◆ Rear Connector



Cx6

Plastic

- ◆ Available stroke (S) range = 50~300mm

- ◆ Retracted length (A)


Front connector = C1x, C3x, CBx \geq stroke + 256mm

Front connector = C9x \geq stroke + 282mm

Front connector = CAx \geq stroke + 265mm

- ◆ Extended length (B) = S+A

Ordering Key

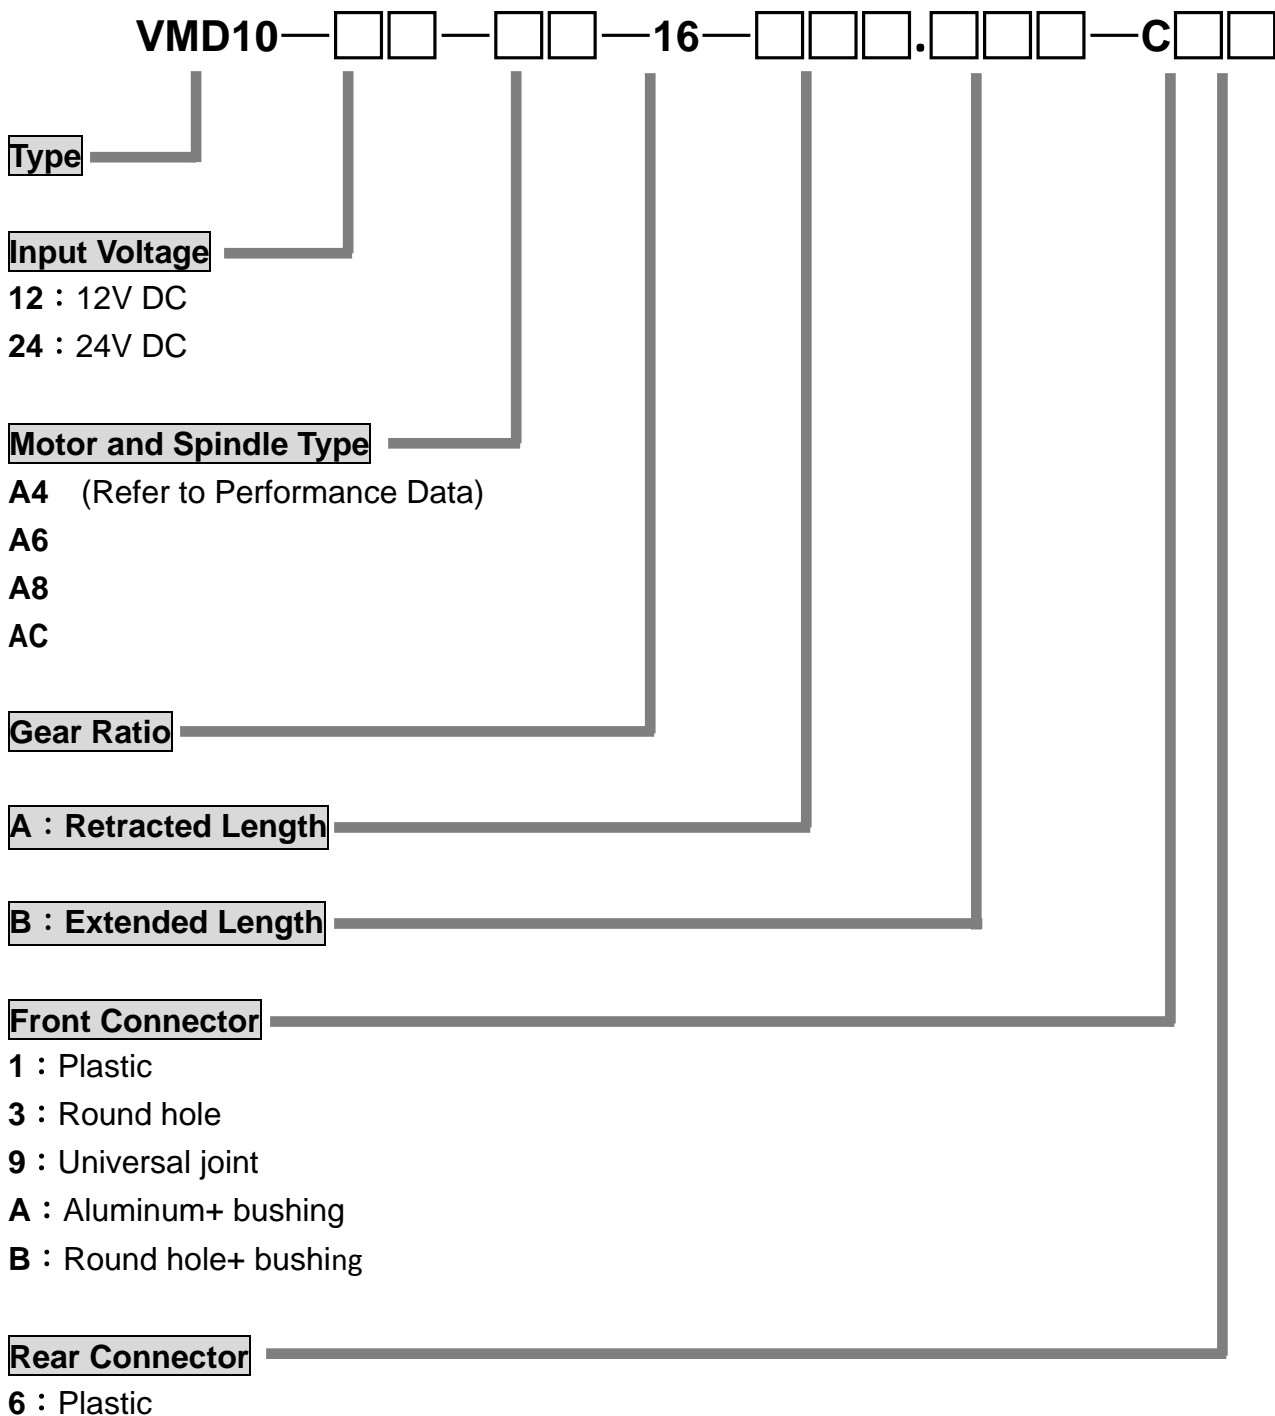

Terms of Use

The user is responsible for determining the suitability of Venture products for specific applications. Due to continuous development in order to improve its products, Venture products are subject to frequent modifications and changes without prior notice. Venture reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by Venture Mfg. Co..